

# MODEL: BA385V2 SMT PICK & PLACE MACHINE



## SUMMARY

- High Accuracy and high Flexibility for 01005, 0201, SOIC, PLCC, BGA,  $\mu$ BGA, CSP, QFP, up to fine-pitch 0.3mm
- Non-contact Linear Encoder System for high Repeatability and Stability
- Smart Feeder System provides Automatic feeder Position Checking, Automatic Component Counting, Production Data Traceability
- Perfect for medium & high volume Production
- COGNEX® Alignment System "Vision on the Fly"
- Bottom Vision Alignment System for fine pitch QFP & BGA
- Built in Camera System with Auto Smart Fiducial Mark Learning
- Dispenser System
- Vision Inspection before and after Production
- Windows 2000 / XP Software
- Universal CAD Conversion
- Placement rate: 8000 CP/H
- Ball Screw Systems in X- and Y-Axes
- Suitable for 128 intelligent Auto Tape Feeder
- Quick change Feeder Trolley

The SMT Pick & Place Machines of AUTOTRONIK series were especially designed for medium and high volume batch sizes. Various models are provided for different applications.

BA385 is using KFTA series feeder same as the feeder used for our BS384, BS391 and BA683 AUTOTRONIK series Pick & Place Machines. By this means most reliability and easy maintenance for all models is guaranteed. Preloaded Ball Screws with Servo Motor system provides high Speed, Repeatability and Stability.

Additionally, the two "Vision on the Fly" alignment heads in BA385 are using Cognex® Vision System, providing high accuracy and easy learning for all different kind of components.

MODEL: BA385V2  
SMT PICK & PLACE MACHINE




**AUTOTRONIK**  
Fertigungssysteme für die Elektronikindustrie

AUTOTRONIK-SMT GmbH  
Sulzbacher Str. 111  
92224 Amberg, Germany  
tel +49 (0) 9621-600 691  
fax +49 (0) 9621-600 692  
mail [office@autotronik-smt.com](mailto:office@autotronik-smt.com)  
[www.autotronik.de](http://www.autotronik.de)

## DETAILS

### Strong and rigid mechanical design

BA385 using welded steel frame which guaranteed a strong and rigid mechanical design. Preloaded Ball Screws with Servo Motor system provides high Speed, Repeatability and Stability.

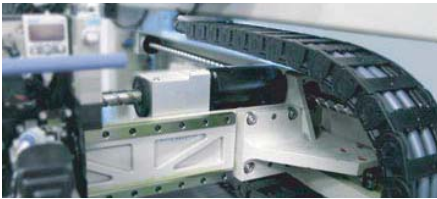

### Non-contact Linear Encoder System (Option)

By using „Closed Loop“ Servo Motors with non-contact Linear Encoder System, provide extremely high Repeatability and Stability.


### COGNEX® Alignment System "Vision on the Fly"

The BA385 feature COGNEX® vision processing and head-mounted for non-contact „Vision on the Fly“ alignment. The machine BA385 assures high-precision placement of the full range of SMDs, from the smallest 0201 devices through CSPs, µBGAs, flip-chips, ultra-fine pitch 0.3mm for QFPs, even odd-form components.



### Bottom Vision Alignment System (Option)

A Bottom Vision Camera is used for large components up to 150 x 100 mm and devices with alignment features on their bottom side. Due to additional Bottom Vision Camera, the alignment of 01005 components is guaranteed.

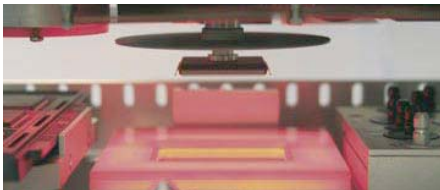

### Dispenser System

Optional stand alone dispenser head for adhesive & solder paste dispensing. Perfect for quick, small volume production without making stencil.



### Smart Fiducial System

Beside the standard fiducial mark, either square SMD PCB pad or plate-through hole also can be trained as fiducial mark. For more precise placement of fine pitch components, additional Local fiducial recognition is provided.

### Universal CAD Conversion

Beside the direct input of data by teach-in camera, an optional CAD conversion program is available for directly transfer of CAD generated pick and place data.

### Auto Tape Feeder (KFTA)

The innovative design of KFTA feeder bases and mounting hardware allows almost limitless flexibility in feeder combinations and arrangement schemes, as almost every feeder can be ordered, loaded, programmed and mounted independently. KFTAs are available from 8 mm up to 72 mm tape width.



### Conveyor System

The optional conveyor system with SMEMA Interface and motor-driven-width-control speeds up the handling of PCB and in-line production.

### Feeder Rack (FR-32K)

FR-32K is suitable for 32 x 8 mm KFTA Feeders or for 30 x 8 mm IC-Sticks (1x KFTB-2 / 1x KFTB-4).

### Feeder Rack Trolley (FR-CR-32K) (Option)

During production the user is able to change all 32 x 8 mm Feeders by rapidly changeable Feeder Trolley at the same time.



### Universal IC Tube Feeder

KFTB universal tube feeder combines vibration driven technique. It is able to handle IC-Sticks with max. 50 mm width.

KFTB-2 (10 pcs of 8 mm IC-Sticks)

KFTB-4 (20 pcs of 8 mm IC-Sticks)



### Buffering Nozzle

The spring buffering design of Nozzle adjust the placement pressure for different heights of components automatically.

### Vision Inspection

With the built-in software, the camera can automatically move and display the image in the computer screen. User can manually check the printing accuracy of solder paste, quality of the soldering, accuracy of component placement, etc...

### Remote Service Kit

Optional Remote Service Kit allows a remote access to machine by Internet, so that programming, calibration and service can be done by our worldwide remote service center.

## SPECIFICATION

- Number of Heads (Vision on the Fly):  
BA385V2: 2
- Placement rate (under the optimum condition):  
BA385V2: 8000 CP/H, 5500 CP/H (IPC 9850)
- Feeder capacity (8 mm)  
without conveyor: up to 128 Tape Feeders
- Feeder capacity (8 mm)  
with conveyor: up to 64 Tape Feeders
- IC Tray capacity: up to 2 Waffle Trays
- Component Sense: Vision detection
- Component Sizes  
Handled by head camera:
  - Smallest: 0.6 x 0.3mm
  - Largest: 16 x 14 mmHandled by fixed Bottom Vision Camera:
  - Smallest: 0.4 x 0.2 mm (option)
  - Largest: 150 x 100 mm (option)
- Resolution:
  - X / Y axis 0.005 mm Servo Motor
  - Z axis 0.02 mm Servo Motor
- Rotation: 0 to 360° (0.045°/step) Servo Motor
- Placement Accuracy: +/- 0.04 mm  
+/- 0.03 mm (by optional linear encoder)
- X-Y Repeatability: +/- 0.01 mm
- Placement Area  
Feeder Rack front and back:
  - Max. 440 x 350 mm (w/o IC-Tray)
  - Max. 440 x 210 mm (with IC-Tray)Feeder Rack from all four sides:
  - Max. 370 x 350 mm (w/o IC-Tray)
  - Max. 370 x 210 mm (with IC-Tray)Feeder Rack front and back + conveyor:
  - Max. 435 x 350 mm (w/o IC-Tray)
  - Max. 435 x 160 mm (with IC-Tray)by optional PCB fixture  
Standard PCB fixture:  
For max. PCB size 270 x 350 mm (w/o IC-Tray)
- Programming:
  - Direct input
  - Vision teach-in
  - CAD Access (Option)
- Main Control: Industrial PC
- Power: 230 V / AC - 2100 W
- Pressure: 75 psi (5.5 bar)
- Machine Size: 1200 x 1000 x 1300 mm (L x W x H)
- Weight: 450 kg

We reserve the right to make changes without notice.